


L-CT4IT00-YP00W






Cat1

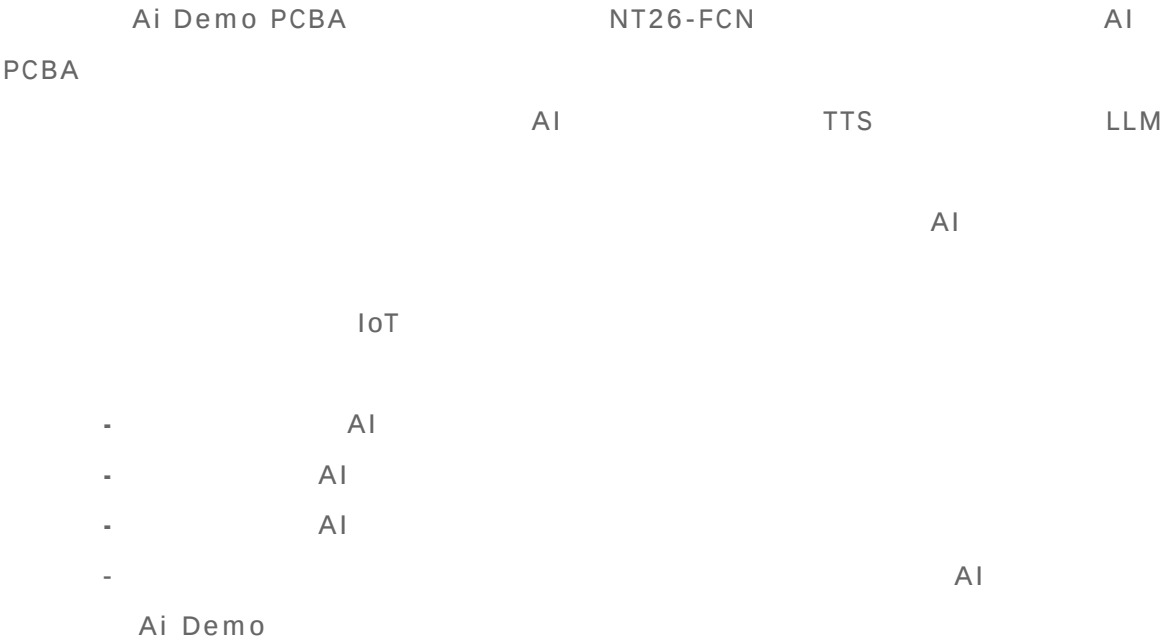


AI



PCBA



L-CT4IT00-YP00W

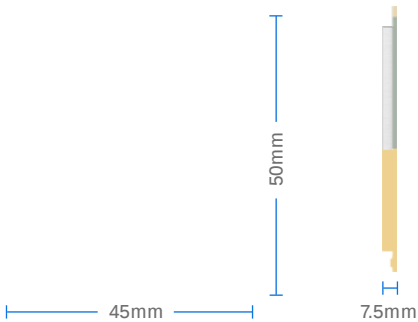

General Information

/	
Cat.1	NT26-FCN
	PCBA
(mm)	45× 50× 7.5(L*W*H)
	5V

Operating Temperature

-10 °C ~ +60 °C	
-----------------	--

Radio Frequency

LTE-FDD	B1/B3/B1/B5/B8
LTE-TDD	B34/B38/B39/B40/B41(140MHz)

Connectivity

AI	Deepseek	Coze	
USB / DFOTA			

Display

Ai	*		
/	*		
	*		
AI	QVGA	*	*

Performance

LTE-FDD	M f Ũ M γ
LTE-TDD	MД Ũ96Mbps M B Ũ1Mbps

Power Management

&			
(U)SIM	× 1	1.8V	3.0V
LED	× 3		
LCM	× 2*		
	× 1*		
	× 1		
SPK	× 1		
Mic	× 1		
USB 2.0	× 1		
	× 6		
FLASH	*		
Codec	×1*		

