





1-1

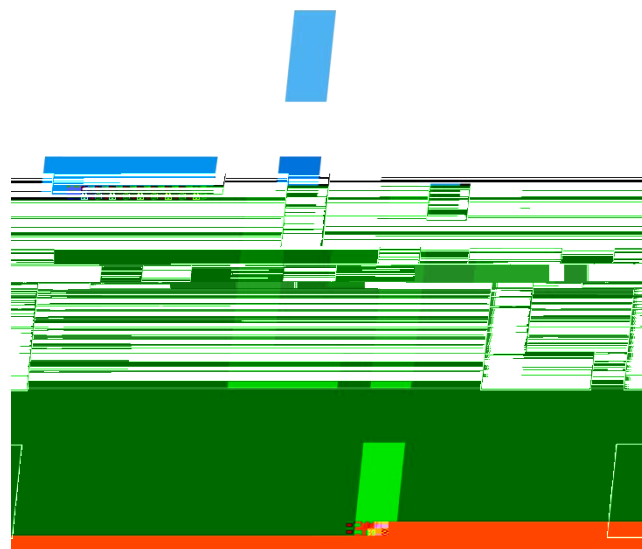


8c

1

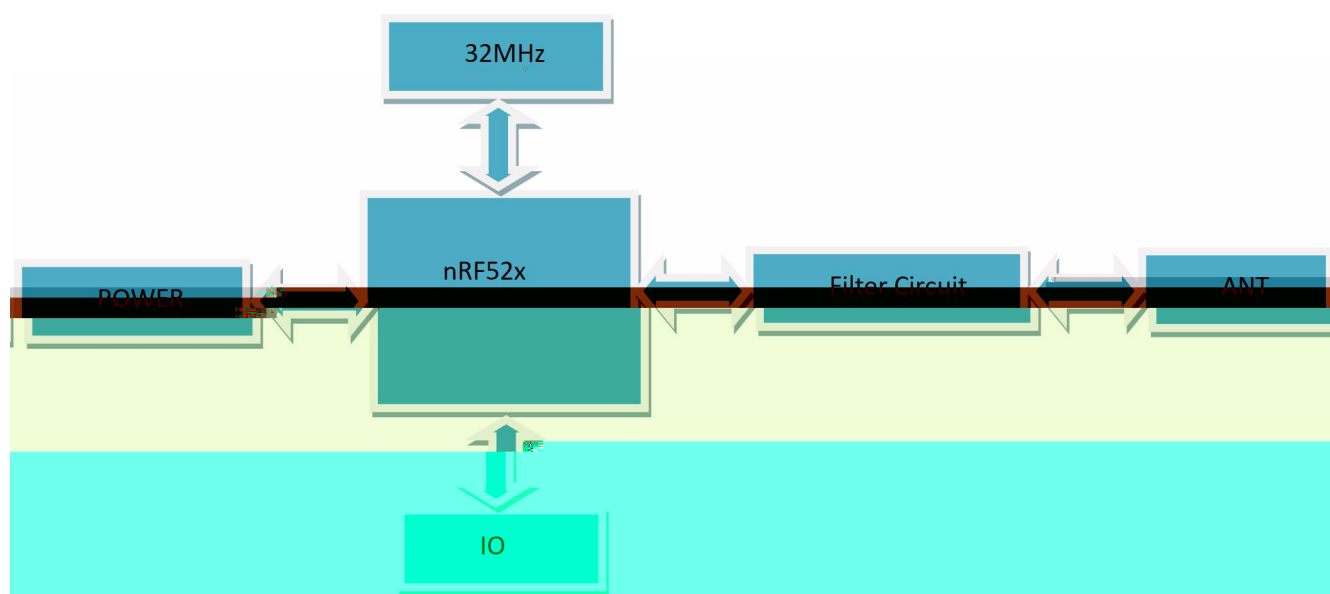




2 SB97

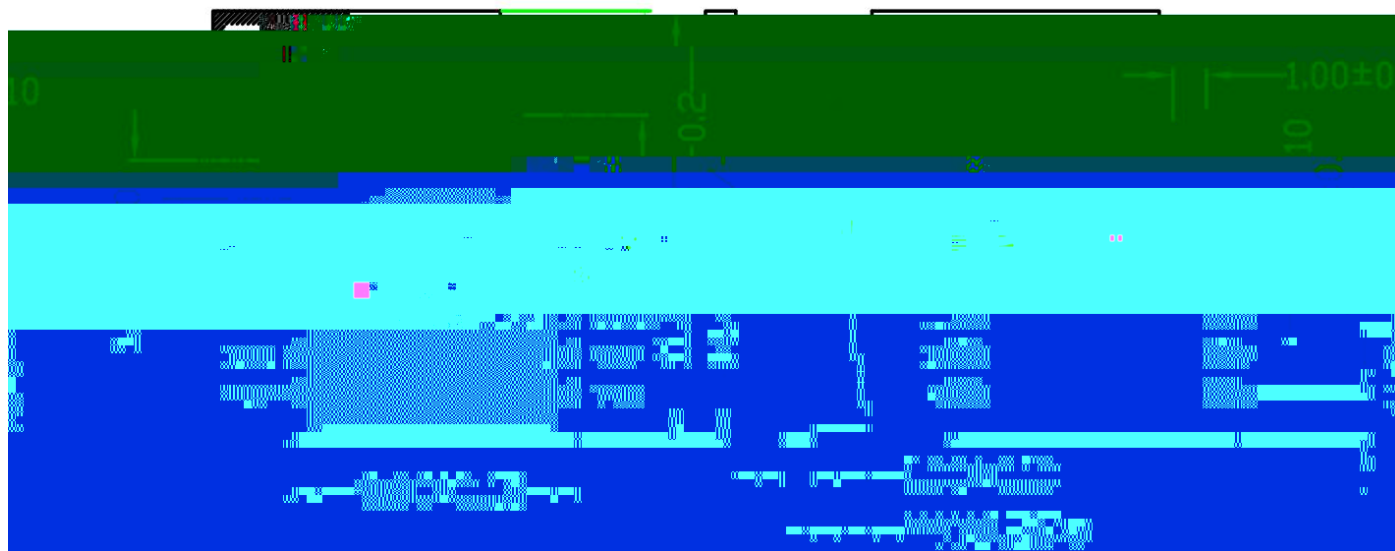

3 SB97

N

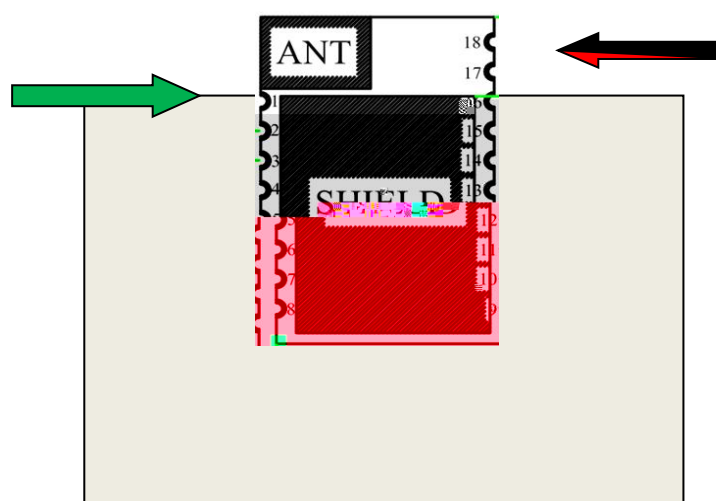

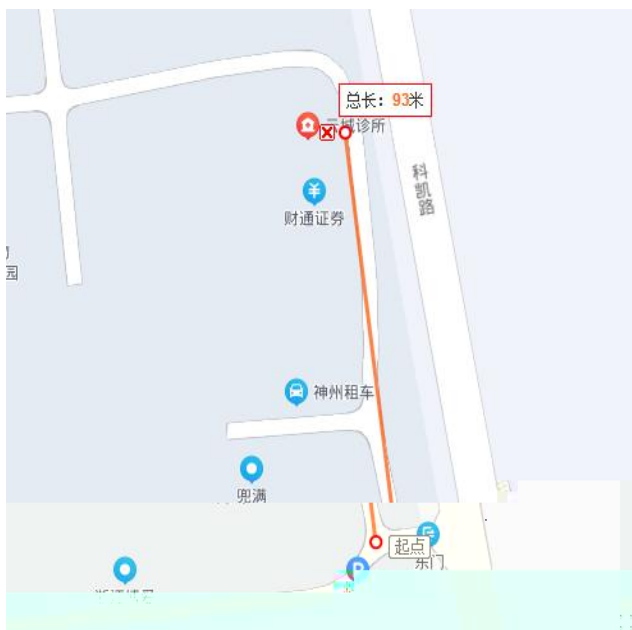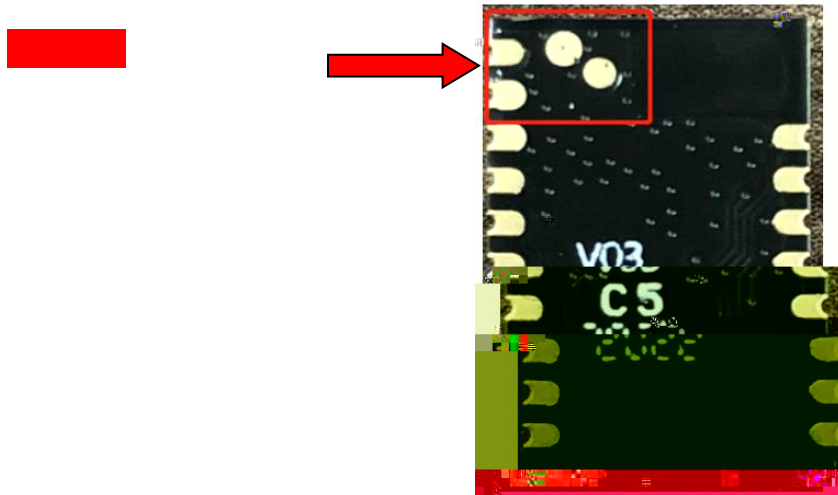



Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
ID																																A	
Reset	0x00000000																																
ID	Acce Field		Value ID		Value		Description																										
A	RW		LFXODEBOUNCE		Normal		0		LFXO debounce time. 8192 32.768 kHz periods, or 0.25 s. Recommended for normal Operating Temperature conditions.																								
			Extended		1		16384 32.768 kHz periods, or 0.5 s. Recommended for Extended Operating Temperature conditions.																										

为

的

的

		MOQ(PCS)	(PCS)	
		6400	1280	5
		6400	1280	5
		6400	1280	5

